




# Magellan Roadmate 9055-LM Speaker Replacement

How to replace the speaker from the gps

Written By: Giovanni

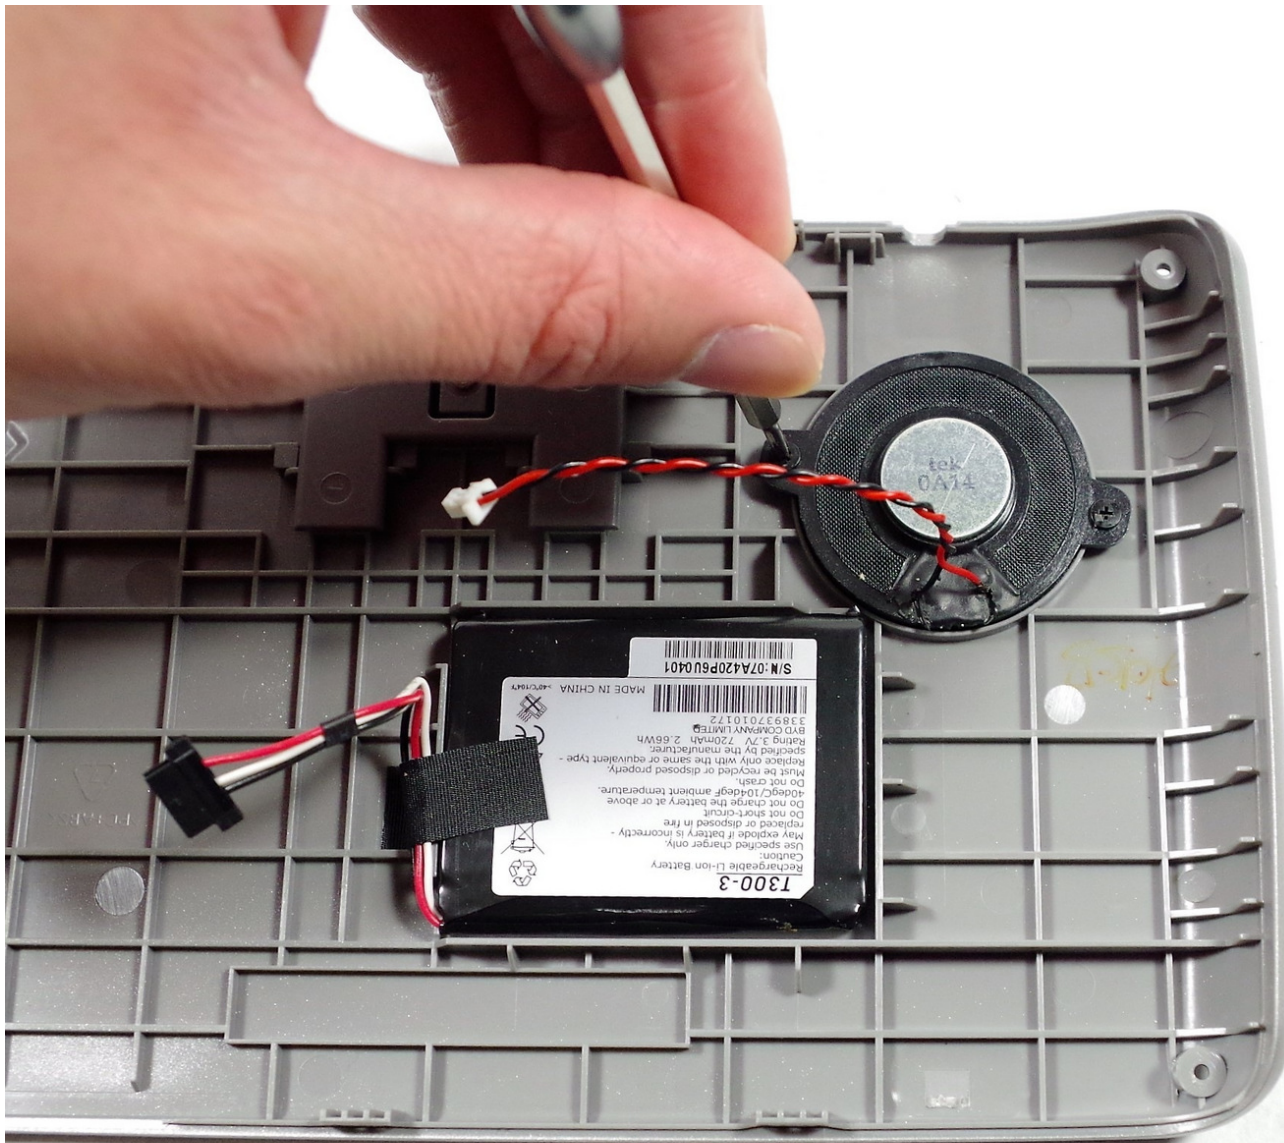



## TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Magellan Roadmate 9055-LM Back Panel Disassembly



⚠ Flip your device with back panel facing up.

## Step 2



- Unscrew four Phillips #0 screws from the back panel.



## Step 3




- Unscrew two Phillips #0 screws from the back panel.

## Step 4



- Use a plastic opening tool to pop the right side of the panel.



## Step 5

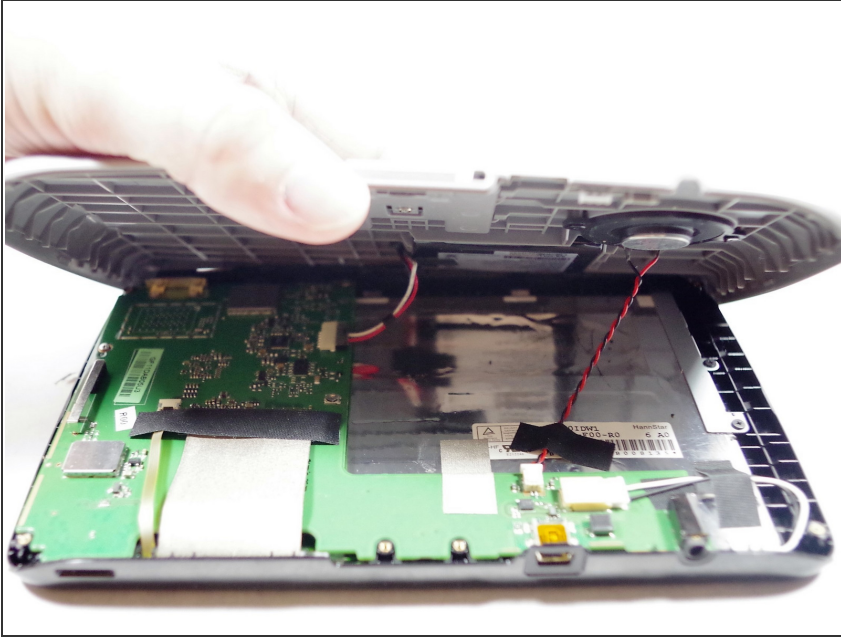

⚠ Lifting the back panel too quickly or forcefully may damage the speaker cable and battery cable, which are still attached underneath.

- Gently lift up the back panel.

## Step 6

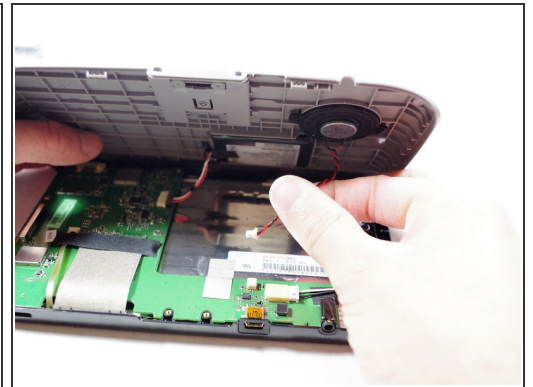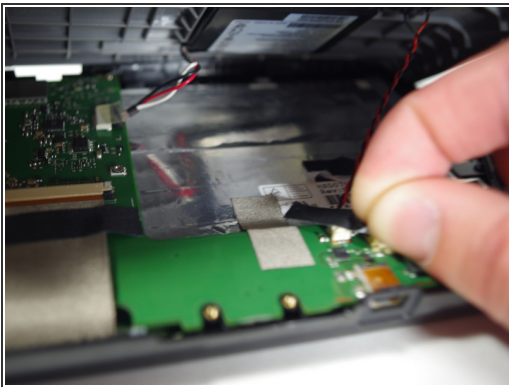

- Remove the tape.
- Unplug the cable for the speaker.


## Step 7



- Remove the cable of the battery.

**i** Tape removal is not necessary.


## Step 8

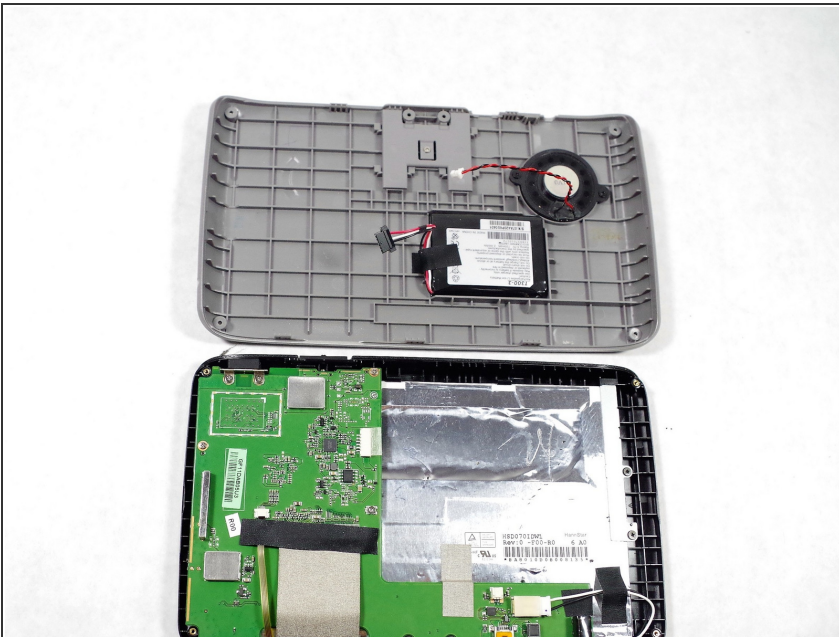

- Place the back panel gently on the table.




## Step 9 — Speaker

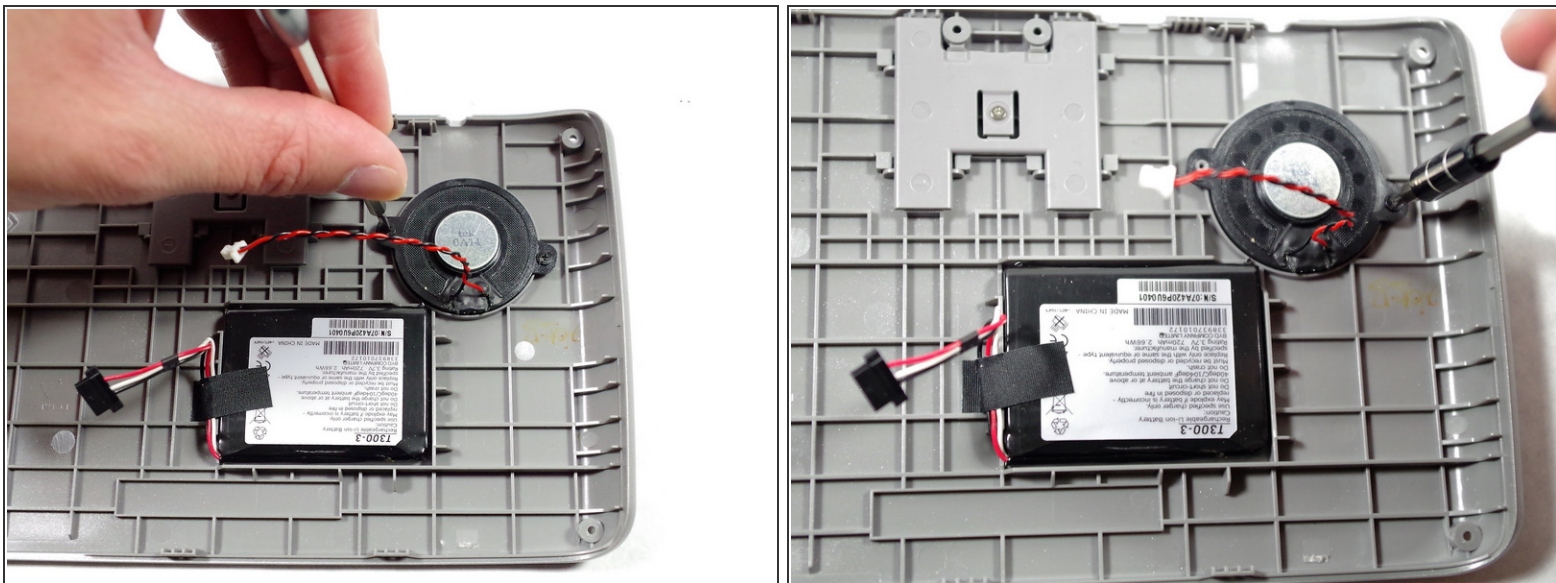

- Unscrew the left and the right screws using the ifixit screwdriver.

## Step 10

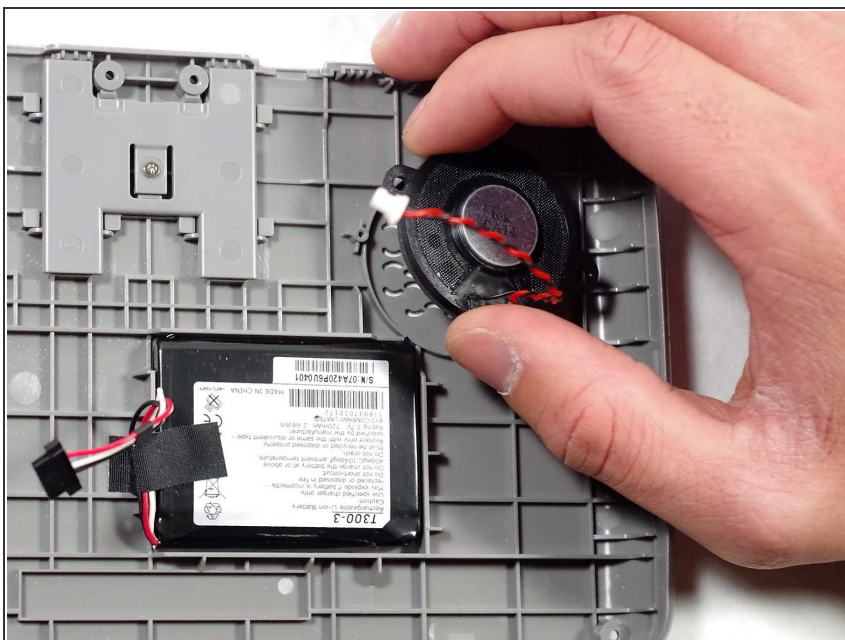

- Now that you removed the screws, you can finally replace the speaker.

To reassemble your device, follow these instructions in reverse order.

